


Preferred Pack[®]

6FT. FLIGHTED/LUGGED IN-FEED CONVEYOR

The New Industry Standard for Quality and Reliability

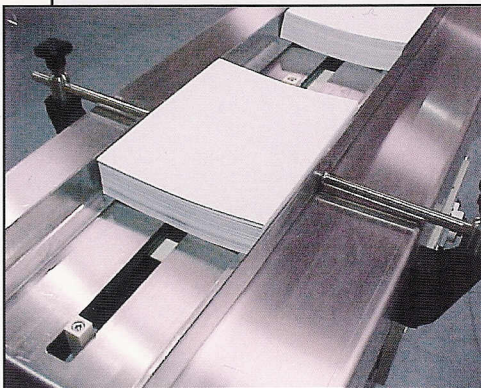

When using optional "paper guide rails" the square pushing lug will keep a stack of paper square to reduce shingling.



6 Foot Flighted/Lugged In-feed Conveyor. Optional Friction Feeders can be added.



Infeed conveyor can be mounted next to any automatic machine or can be plugged directly into the Preferred Pack machine using quick disconnects.

MODEL	POWER	DIMENSIONS			HEIGHT	PRODUCT WIDTH	FLIGHT SPACING
PP72F	220 VOLT 8 AMP	L	W	H	From 23" to 34"	Min. 2" Max. 20"	Standard: 18"
		79" x 21" x 30"					