

Preferred Packaging Group®

ECONOMY COMBINATION L'SEALER AND SHRINK TUNNEL

***New Design
Now Featuring
"Micro Knife"
Technology***



Model PP-1519 ECMC

This compact Model PP-1519 ECMC L' Sealer with magnetic hold down and power discharge conveyor with attached Tunnel is only 76 inches in total length. Featuring new "Micro Knife" Technology - Will seal PVC or Polyolefin Shrink Films. Tunnel features Live Roller Rod Conveyor with fully Re-Circulating Air Chamber, AC Variable Speed Conveyor, 0 to 60 FPM, Digital Temperature Control and Automatic Cool Down with Shut off. A great machine for low to medium production speeds of 8 to 12 packages per minute. Available in 110 volts or 220 volts.

Model PP-1519 ECMC Shown with Optional Curved Conveyor



Tunnel Control Panel



Sealer Control Panel



*This Machine also available without Magnet Hold Down and Power Discharge Conveyor at a Reduced Price

← PP 180-24 Gravity Curved Conveyor - Optional




Tunnel Features

- Fully Re-Circulating Air Chambers
- AC Variable Speed Drive, 0-60 FPM
- Live Roller Rod Conveyor
- Automatic Cool Down with Shut Off
- Digital Temperature Control 0° to 400°
- Anti-Jam Safety Feature on Conveyor



"Micro Knife" Technology

- Single Piece Teflon Band Ribbon with Round Corner Seal - Reduces Dog Ears
- Will Seal PVC or Polyolefin Shrink Film
- 1 Year Warranty on Band Ribbon
- Dual Magnet Hold Down & Power Discharge Conveyor

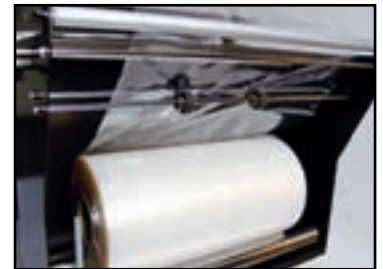

Pin Wheel Hole Punch

- Easy Load Film Rack
- Multiple Pin Wheels Provide Air Evacuation
- Adjustable Product Loading Tray

MODEL	POWER			SHIPPING WEIGHT	SEAL DIMENSIONS		TUNNEL DIMENSIONS			MACHINE DIMENSIONS			MAX. FILM WIDTH	PROD. RATE
	VOLTS	PHASE	AMPS		W	L	L	W	H	L	W	H		
PP-1519ECMC SERIES	110	1	20	460 lbs.	15	19	20	16	6	76	26	50	22	8-12 PPM
	220	1	15											

* Backed By Preferred Packaging Exclusive 1 Year Warranty